



RL31TM

RADIAL TIRE

ENGINEERED FOR THE TOUGHEST JOB SITES

- *E-3/L-3 Articulated Dump Trucks, Scrapers, Dozers, and Front-End Loaders*




 **YOKOHAMA**[®]

RL31™ RADIAL TIRE

THE CUT-RESISTANT WORKHORSE

With four steel belts, the heavy-duty RL31™ is engineered to thrive in even the most hazardous job sites, and the combination of a lug type tread pattern and shoulder protectors create one of the most cut- and puncture-resistant tires in the industry. Day after day, this tire handles the punishment so you don't have to.




Advanced Composition

Provides outstanding wear, low heat generation and excellent cut-resistance.



Lug Pattern

Provides excellent abrasion and cut resistance on rocky and gravel surfaces.



High Turn-Up Carcass Construction


Protects against exterior damage and sidewall cuts, while providing improved road stability.



Wide Shoulder Protector

Provides excellent cut-resistance to the tread and sidewall.

ROCK-SOLID CONSTRUCTION

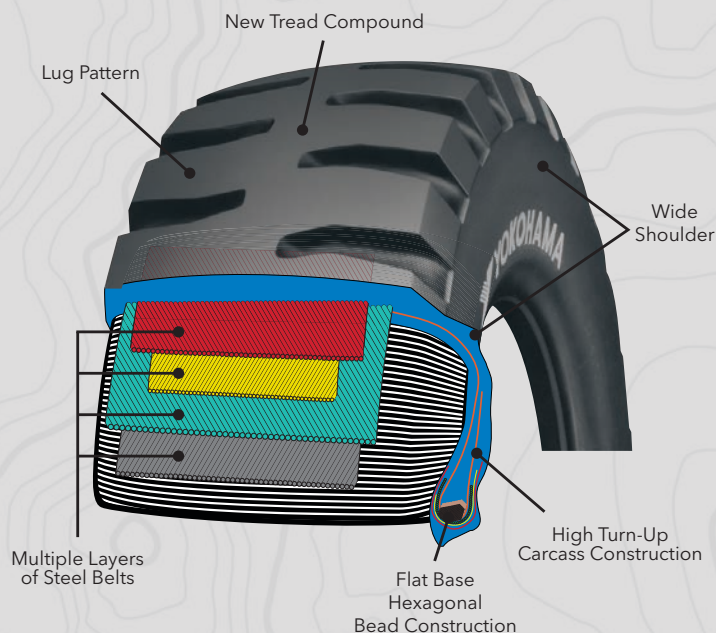

RL31 E-3/L-3

Size	Part#	TRA Code	Compound	Star Mark (*)	Groove Depth	Rim Size	Inflated Dimensions		Static Loaded Radius (in.)	Static Loaded Width (in.)	Ship Weight
							Overall Diameter (in.)	Overall Width (in.)			
20.5R25	13130	E-3	CP	**	44	17.00-2.0	58.9	21.1	27.0	22.5	626
		L-3	CP	*					26.5	23.4	

RL31 E-3

Size	Part#	TRA Code	Compound	Star Mark (*)	Groove Depth	Rim Size	Inflated Dimensions		Static Loaded Radius (in.)	Static Loaded Width (in.)	Ship Weight
							Overall Diameter (in.)	Overall Width (in.)			
17.5R25	03160	E-3	CP	**	40	14.00-1.5	52.8	17.5	24.5	19.1	397
23.5R25	03172	E-3	CP	**	51	19.50-2.5	63.0	24.6	28.3	26.2	896

PLY RATING

LOADER

Size	Star Mark (*)	Ply Rating
20.5R25	*	UP TO 20

EARTHMOVER

Size	Star Mark (*)	Ply Rating
17.5R25	**	UP TO 22
20.5R25	**	UP TO 28
23.5R25	**	UP TO 32