



### **ENGINEERED FOR THE TOUGHEST JOBS**

Whether you're clearing the pit or hauling ore from underground, the  $Y69K^{\text{TM}}$  is constructed from the inside out to handle punishing terrain and the severe strain heavy equipment can inflict.



#### **Modified Sidewall**

Thicker upper sidewall with a more square shoulder profile protects the casing from damage caused by the rigors of severe service.



#### **Steel Breaker Construction**

Certain sizes incorporate special rubber-coated layers of steel cord between the casing and the tread to absorb shocks and prevent cuts from penetrating the casing.



#### **Extra Deep Reinforced Tread**


Provides longer tread life and enhanced durability even in the most extreme conditions.



#### **Specially Formulated Tread Compound**

The special CP-S compound of the Y69K is cut and chip resistant to extend service life.

# DURABILITY. CONFIDENCE. SAFETY.

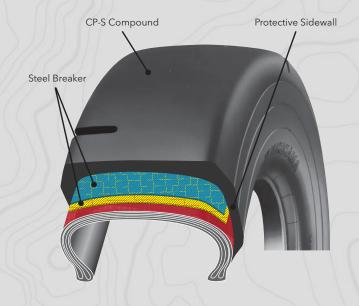

## Y69K L-5S

Size	Part# (Phasing Out)	Part# (New)	Compound	Ply	Groove Depth (1/32)	Rim Size	Overall Diameter (in.)	overall Width (in.)	Static Loaded Radius (in.)	Static Loaded Width (in.)	Ship Weight (lbs.)
18.00-25	06906	130106906	CP-S	32	106	13.00-2.5	66.9	20.5	30.9	21.9	1187
26.5-25	06905	130106905	CP-S	32	114	22.00-3.0	70.5	27.4	32.5	28.5	1697
29.5-29	06965	130106965	CP-S	34	136	25.00-3.5	79.5	30.8	36.9	32.3	2267
35/65-33*	18003	130118003	CP-S	42	121	28.00-3.5	81.5	35.6	38.1	36.5	3001

<sup>\*</sup>Steel breaker construction

